

НАСТРОЙКА РОУТЕРА DLINK DIR300



1. Правильное подключение роутера к ПК/Ноутбуку:

С обратной стороны роутера (в дальнейшем устройства) расположены 5 портов. 4 порта «LAN» служат для подключения оборудования, которое будет работать через кабель. Отдельный порт с надписью «Internet» служит для подключения интернет-кабеля от провайдера.


Соответственно для правильного подключения или настройки устройства, необходимо подключить кабель, который идет в комплекте, в любой из четырех портов «LAN».




2. Настройка устройства

После правильного подключения, открываем любую программу для просмотра страниц в интернете (Opera, Mozilla FireFox, Google Chrome, Internet Explorer и т.д...) и в адресной строке (именно в адресной, НЕ в поисковой, чтобы её найти, необходимо нажать одновременно две клавиши «ctrl» и «L») необходимо написать следующий адрес: 192.168.1.1 (для перехода на эту страницу подключение к интернету не требуется, достаточно сразу после соединения ПК(или ноутбука) с роутером, с помощью кабеля, перейти по адресу 192.168.0.1)

Далее появляется меню для ввода логина и пароля для входа в настройки роутера, по умолчанию логин- «admin», пароль «admin»

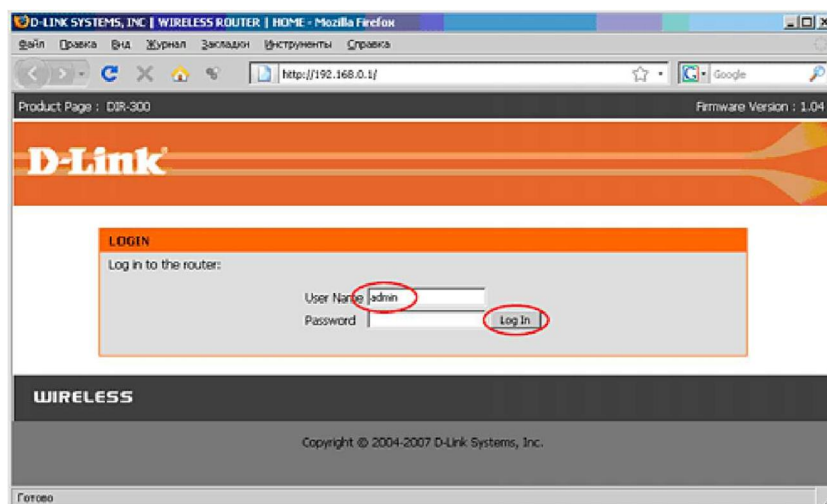


В меню устройства слева в вертикальном выборе опций выберите пункт «Internet Setup», затем в меню в центре нажмите на кнопку «Manual Internet Connection Setup»

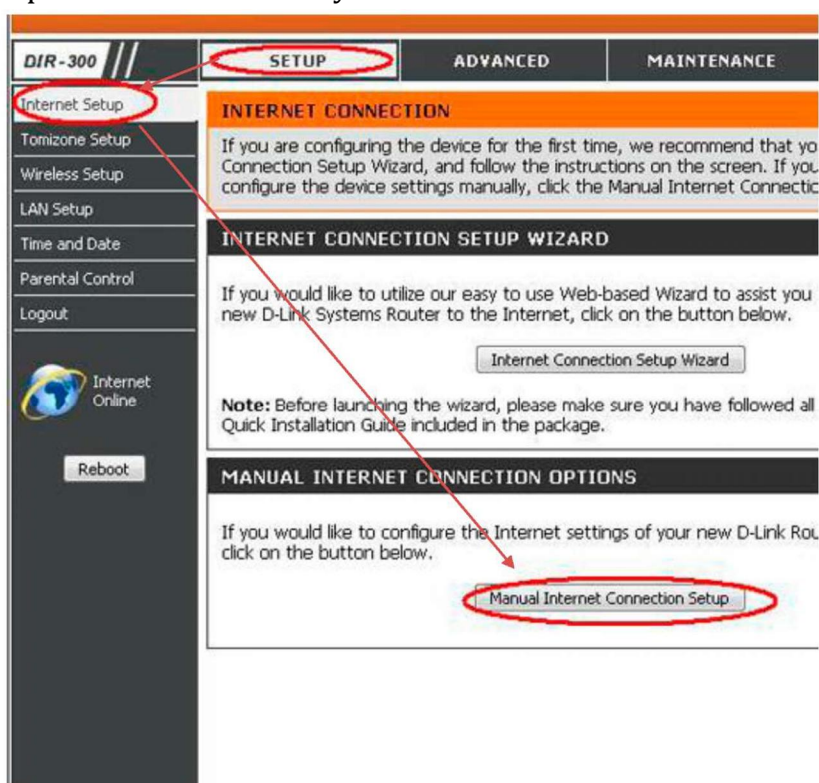

В открывшемся меню настройки соединения с сетью Интернет (рис.8) в разделе «Internet Connection Type» выбираем в ниспадающем списке пункт - «PPPoE user name/password», после выбора этого варианта ниже открывается раздел, который так и называется PPPoE .

В нем ставим точку на пункт «Dynamic PPPoE», далее в поле «User name» необходимо ввести ваш логин с договора, а в поля «Password» и «Confirm password» необходимо ввести пароль с вашего договора. Ниже необходимо нажать кнопку «Clone MAC Address».

В остальных полях менять ничего не нужно, за исключением строчки «Connect mode select» - в этом поле необходимо поставить точку на вариант «Always».

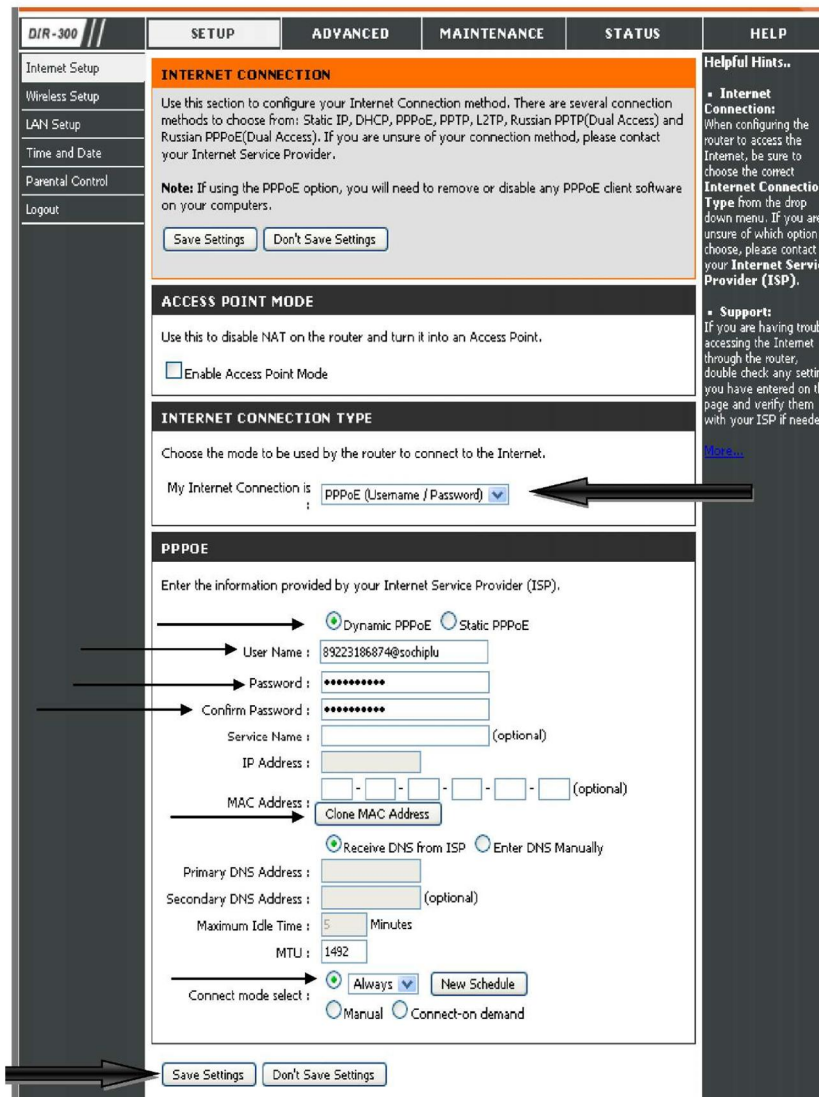

DIR-300 // SETUP ADVANCED MAINTENANCE STATUS HELP

INTERNET CONNECTION
 Use this section to configure your Internet Connection method. There are several connection methods to choose from: Static IP, DHCP, PPPoE, PPTP, L2TP, Russian PPTP(Dual Access) and Russian PPPoE(Dual Access). If you are unsure of your connection method, please contact your Internet Service Provider.

Note: If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers.

ACCESS POINT MODE
 Use this to disable NAT on the router and turn it into an Access Point.

Enable Access Point Mode

INTERNET CONNECTION TYPE
 Choose the mode to be used by the router to connect to the Internet.

My Internet Connection is :

PPPoE
 Enter the information provided by your Internet Service Provider (ISP).

Dynamic PPPoE Static PPPoE

User Name :

Password :

Confirm Password :

Service Name : (optional)

IP Address :

MAC Address :

Receive DNS from ISP Enter DNS Manually

Primary DNS Address :

Secondary DNS Address : (optional)

Maximum Idle Time : Minutes


MTU :

Connect mode select : Always Manual Connect-on demand

Helpful Hints..

- Internet Connection:** When configuring the router to access the Internet, be sure to choose the correct Internet Connection Type from the drop down menu. If you are unsure of which option to choose, please contact your Internet Service Provider (ISP).
- Support:** If you are having trouble accessing the Internet through the router, double check any settings you have entered on this page and verify them with your ISP if needed.

Слева, в меню устройства, в вертикальном выборе опций выберите пункт «Wireless Setup», затем в меню в центре нажмите на кнопку «Manual Wireless Connection Setup»

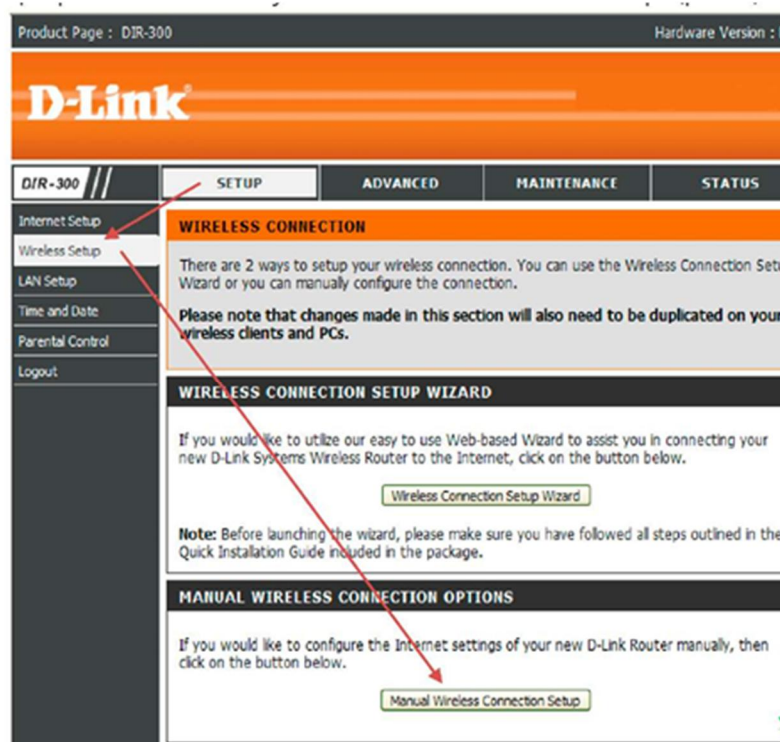

Product Page : DIR-300 Hardware Version : B

D-Link

DIR-300 // SETUP ADVANCED MAINTENANCE STATUS

Internet Setup
Wireless Setup
 LAN Setup
 Time and Date
 Parental Control
 Logout

WIRELESS CONNECTION
 There are 2 ways to setup your wireless connection. You can use the Wireless Connection Setup Wizard or you can manually configure the connection.

Please note that changes made in this section will also need to be duplicated on your wireless clients and PCs.

WIRELESS CONNECTION SETUP WIZARD
 If you would like to utilize our easy to use Web-based Wizard to assist you in connecting your new D-Link Systems Wireless Router to the Internet, click on the button below.

Note: Before launching the wizard, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package.


MANUAL WIRELESS CONNECTION OPTIONS
 If you would like to configure the Internet settings of your new D-Link Router manually, then click on the button below.

В разделе «Wireless Network Settings», в первой строчке ставим галочку на пункте «Enable Wireless». В поле «Wireless network name» можно написать удобное для вас название вашей беспроводной сети (название, с которым позже ваша сеть будет определяться другими устройствами (ПК, ноутбук, телефон)) - название набирается цифрами или латинскими буквами.

Далее, необходимо поставить галочку на пункте «Enable auto channel selection» В строчке «Transmission rate» выбираем в ниспадающем списке пункт «Best (automatic)» В разделе «Wireless Security mode» выбираем в ниспадающем списке : «Enable WPA/WPA2 Wireless Security», после чего ,ниже, появится раздел

«WPA/WPA2» в нем единственное, что нужно написать - это ключ вашей беспроводной сети в поле «Network key», что бы к сети могли подключаться только вы, либо тот , кто знает данный ключ. Ключ должен состоять минимум из 8 символов(цифр или латинских букв).

Последнее что необходимо сделать - нажать кнопку SAVE SETTINGS для того, что бы сохранить все настройки.

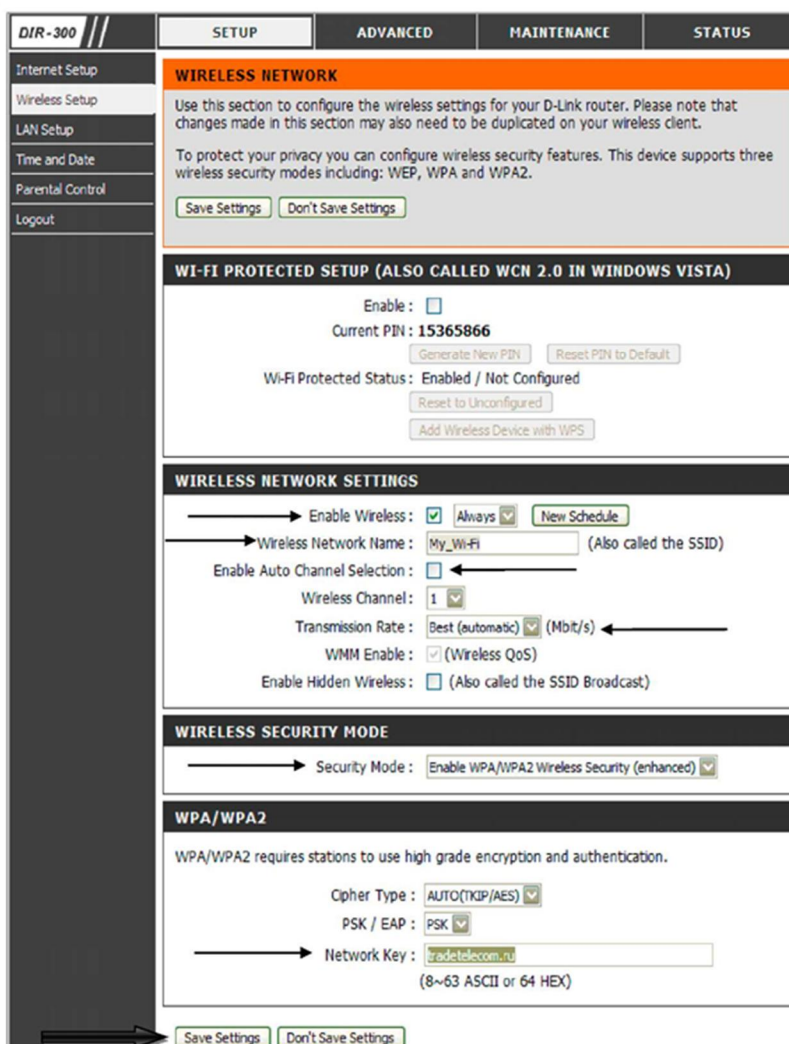

The screenshot shows the configuration interface for a DIR-300 router. The main navigation tabs are SETUP, ADVANCED, MAINTENANCE, and STATUS. The left sidebar contains links for Internet Setup, Wireless Setup, LAN Setup, Time and Date, Parental Control, and Logout. The main content area is titled 'WIRELESS NETWORK' and includes the following sections:

- WI-FI PROTECTED SETUP (ALSO CALLED WCN 2.0 IN WINDOWS VISTA)**: Includes an 'Enable' checkbox, a 'Current PIN' of 15365866, and buttons for 'Generate New PIN', 'Reset PIN to Default', 'Reset to Unconfigured', and 'Add Wireless Device with WPS'.
- WIRELESS NETWORK SETTINGS**: Includes 'Enable Wireless' (checked), 'Wireless Network Name' (My_Wi-Fi), 'Enable Auto Channel Selection' (unchecked), 'Wireless Channel' (1), 'Transmission Rate' (Best (automatic)), 'WMM Enable' (checked), and 'Enable Hidden Wireless' (unchecked).
- WIRELESS SECURITY MODE**: Includes 'Security Mode' set to 'Enable WPA/WPA2 Wireless Security (enhanced)'.
- WPA/WPA2**: Includes 'Cipher Type' (AUTO(TKIP/AES)), 'PSK / EAP' (PSK), and 'Network Key' (tradeltelecom.ru).

At the bottom of the page, there are 'Save Settings' and 'Don't Save Settings' buttons.

Настройка роутера завершена!